

## Entry-level 16x1 multiviewer

# WOXCON



### Introduction

This is a 16x1 HDMI Multi-viewer is a high performance with 16 HD screen segmentation and seamless switching output. It can display 16 HD digital video signal on the same screen, and has a variety of video segmentation, seamless switching 16 HD input signal synchronously. The control methods of the switch is flexible, it can be switched via button and IR control. It's a very practical and stable switch and easy to install, can be used in the major projects, meeting halls and other places.

### Features


- Support 16 HDMI inputs, one HDMI output;
- Support 16 HDMI signal screen segmentation;
- Support 16 HDMI signal seamless switching;
- Support IR remote control

### Specification

HDMI input resolution .....	up to 1080P/60Hz
HDMI output resolution .....	up to 4K/30Hz
Input and output cable distance .....	≤10M AWG26 HDMI standard cable
Power adapter format .....	Input: AC (50HZ, 60HZ) 100V-240V; Output: DC12V/2A
Operating temperature range .....	(-15℃ to +55℃)
Dimension (L x W x H) .....	460x150x40 (mm)
Weight .....	1683g


## Working modes:

## Entry-level 16x1 multiviewer

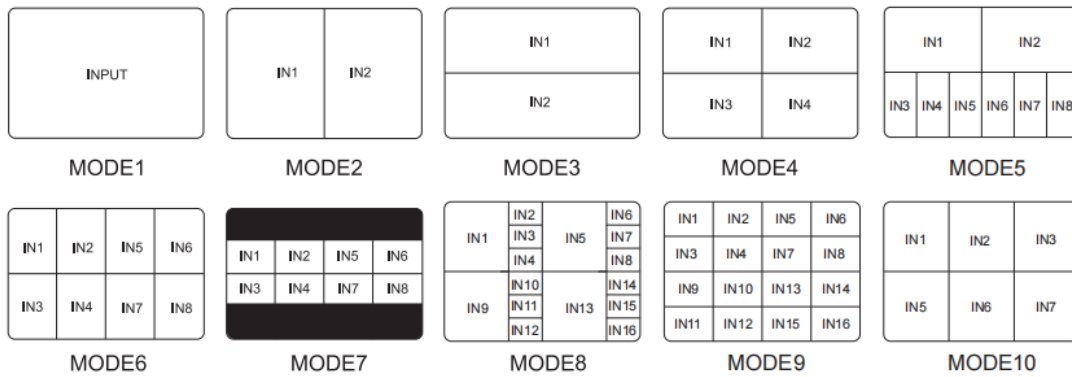

- MODE1: Single image display mode (Channel 1-16 seamless switch)
- MODE2&MODE3: Dual image display mode
- MODE4: Quad display mode
- MODE5: 2 big -6 small display mode
- MODE6: 8 image display mode
- MODE7: 8 image display mode (without stretcher strain)
- MODE8: 4 big -12 small display mode
- MODE9: 16 image display mode
- MODE10: 6 image display mode (HDMI In1-3, HDMI In5-7 / HDMI In9-11, HDMI In13-15)

## Connections:

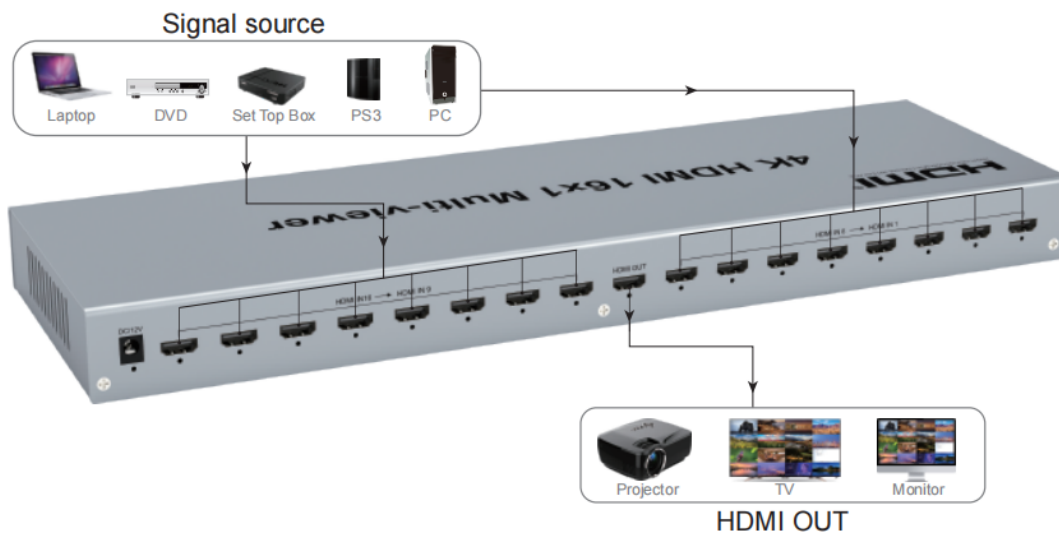

**Application :**

**nultiviewer**



Game



Security monitoring



Pub